

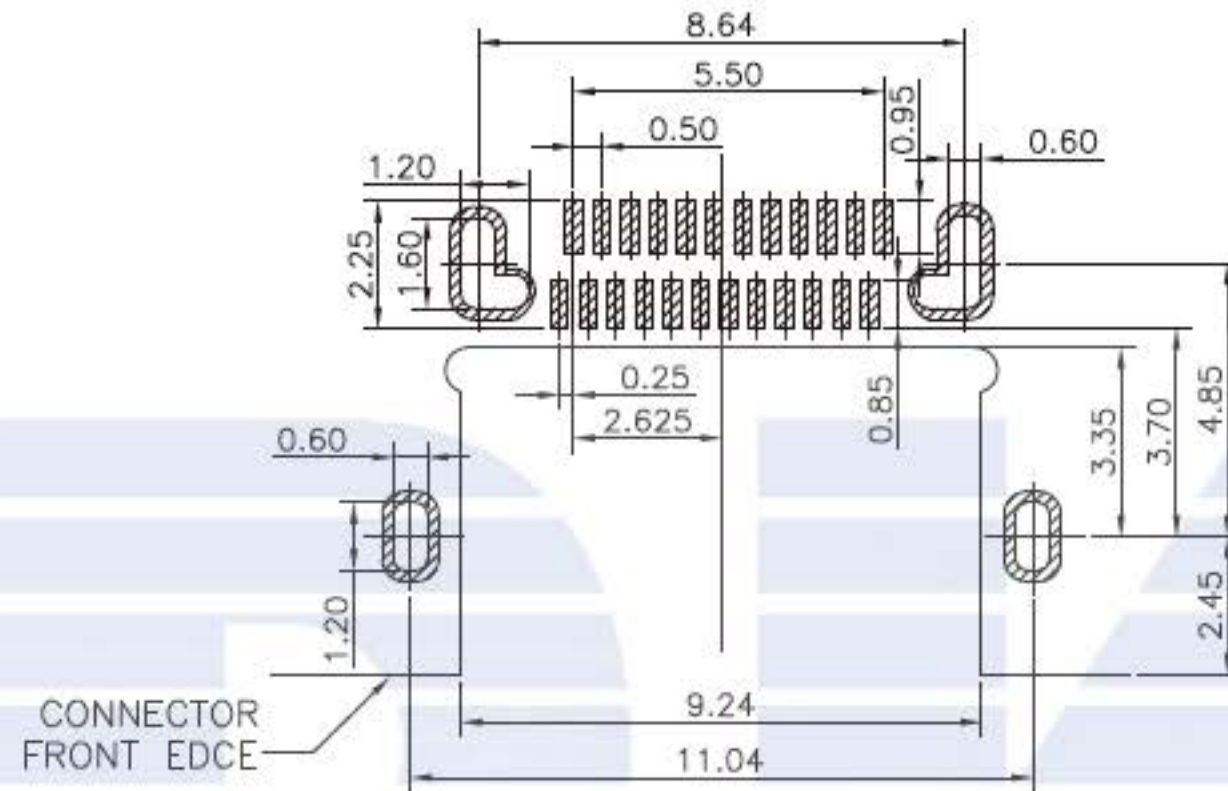
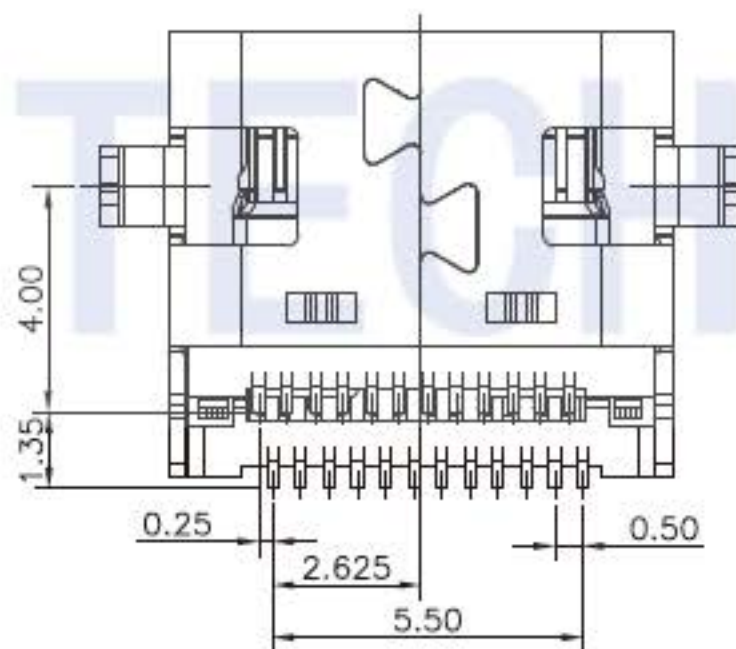
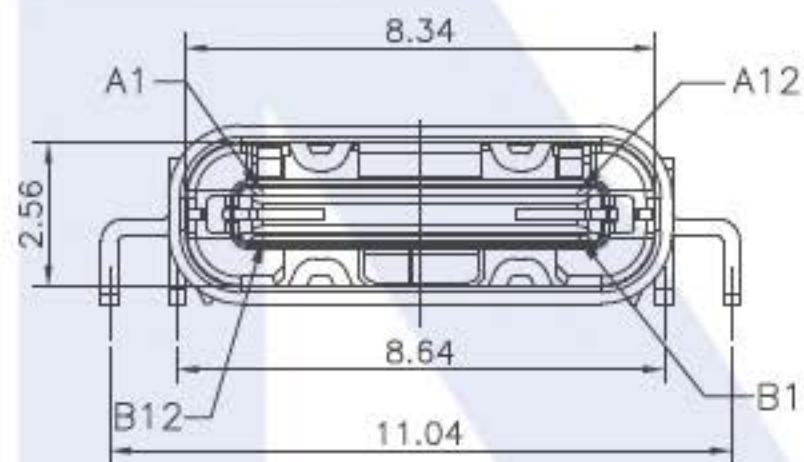
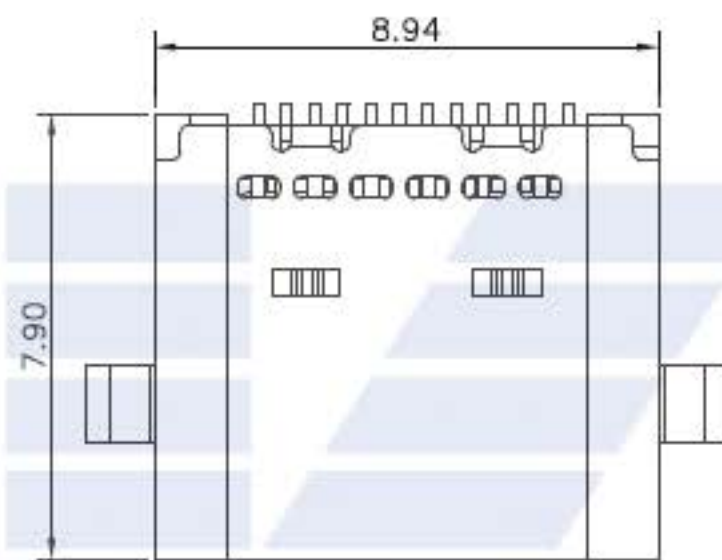
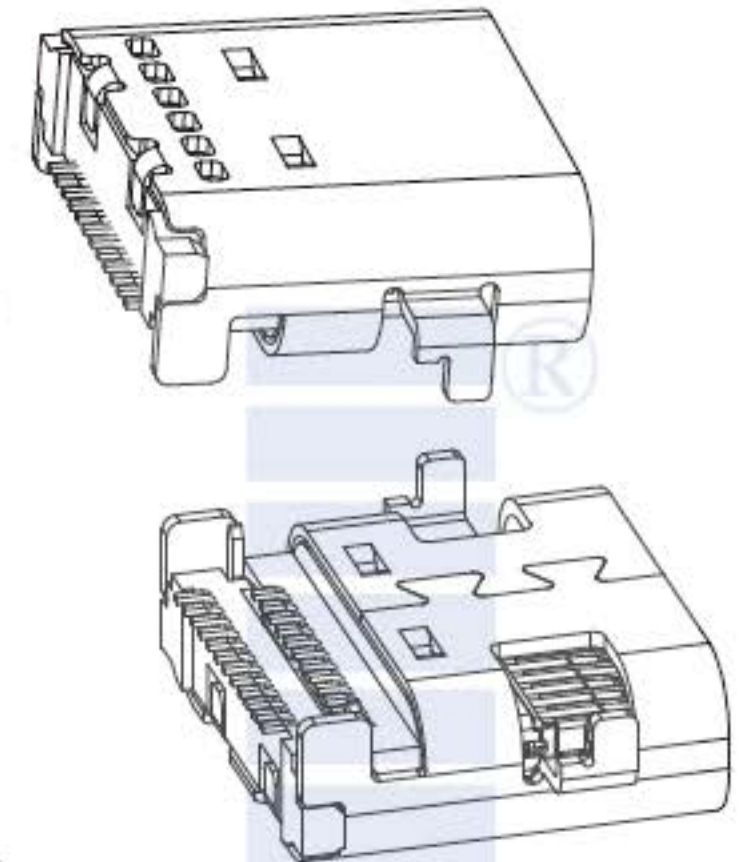


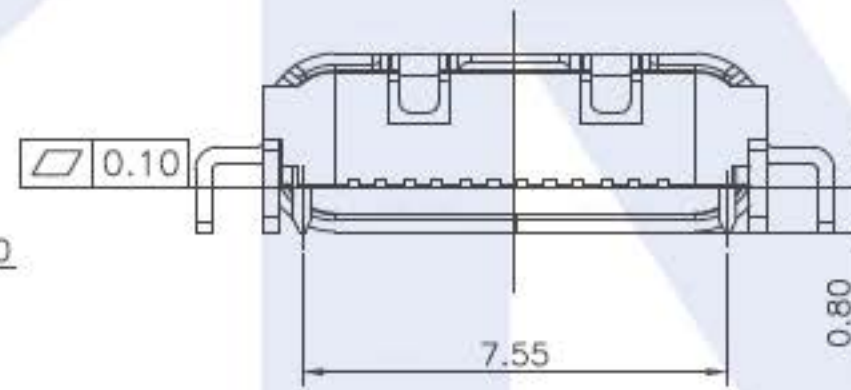

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

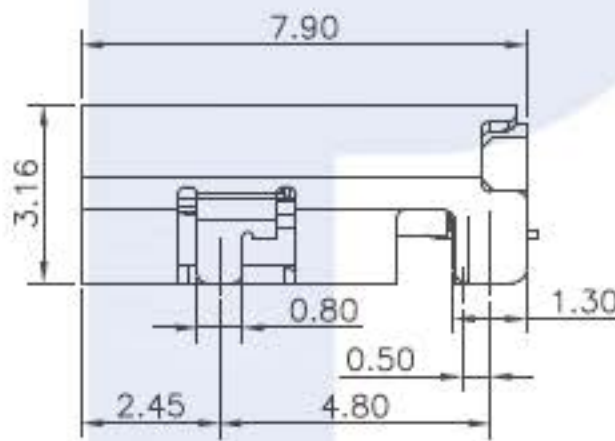

NOTES:
SPECIFICATION:

1. CURRENT RATING: 1.5A~3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

5	SHELL	STAINLESS STEEL	NI/SN Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

MATERIAL NO.:

SEE THE TABLE
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
$\nabla = 0$	X,XXXX $\pm$ ---
$\nabla = 0$	X,XXX $\pm$ ---
$\nabla = 0$	X,XX $\pm$ 0.25
$\nabla = 0$	X,X $\pm$ 0.30
$\nabla = 0$	ANGULAR $\pm$ ---°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO
KPKJ TECHNOLOGY. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

KPKJ 东莞市科牌电子科技有限公司 DONGGUAN KPKJ TECHNOLOGY CO.,LTD		DRAWN BY Jay	DATE 2015.12.30
TITLE USB C TYPE 沉板0.8 CONN		CHECKED BY David	DATE 2015.12.30
DOCUMENT NO. CC-107		APPROVED BY David	DATE 2015.12.30
DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 5:1	THIRD ANGLE PROJECTION

FRAME SIZE: A4